


digilive 16

DIGITAL MIXING CONSOLE

DIGILIVE 16 mixing made easy

- input and output channel metering is clear with the high definition screen
- both input and output levels clearly displayed
- pre and post fader metering

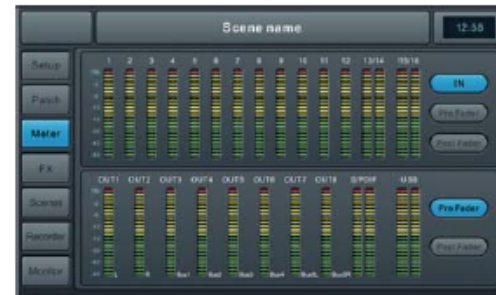

DIGILIVE 16 recording and playback

- built in media player and recorder, or use your favourite android app
- playback from either USB, bluetooth (external module) or internal source
- record from any smart output



SPECIFICATIONS DIGILIVE 16

MIC Input	Channels	Description
LINE Input	12	8 x XLR / 4 x COMBO XLR / JACK
	2 (Stereo)	two 6.5 stereo Jacks, one 3.5 stereo Jack in parallel with one stereo channel
Master output	2 Left/Right balanced XLR	
Smart Outputs	6 assignable balanced XLR	
Internal busses	16	
Stereo Monitor	1	TRS Jack output
Headphone	1	TRS Jack output
Screen	7" high definition touch screen	
Faders	8 x motorized 100 mm faders + 1 x motorized 100mm fader for L/R mix	
Operating System	Android system	
Sample Frequency	48 KHz	
AD/DA	192KHz, 24-bit	
DSP	40-bit float point, SHARC processor	
iPad Remote control	Yes	
Effects	up to 8 assignable effect modules (reverb, modulation, delay, 15 bands GEQ)	
Digital input/outputs		
AES/EBU	Output (XLR)	
S/PDIF	Input / Output (RCA phono)	
USB Interface	2 for playback/recording, scene storage and system updates	
Network	yes via WIFI external module	
Bluetooth	Yes via external module	
Power	90-240V ~ 50/60Hz power supply 12VDC output	
Dimension (WxHxD)	350x380x150mm	



16 INPUT - 16 BUS - 8 OUTPUT
DIGITAL MIXING MADE EASY